
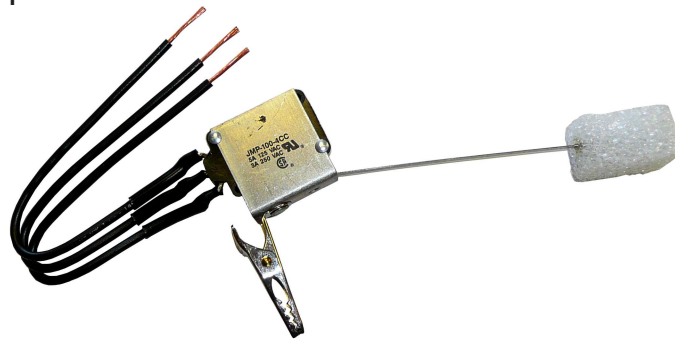


JMP Series

Float & Sail Switches

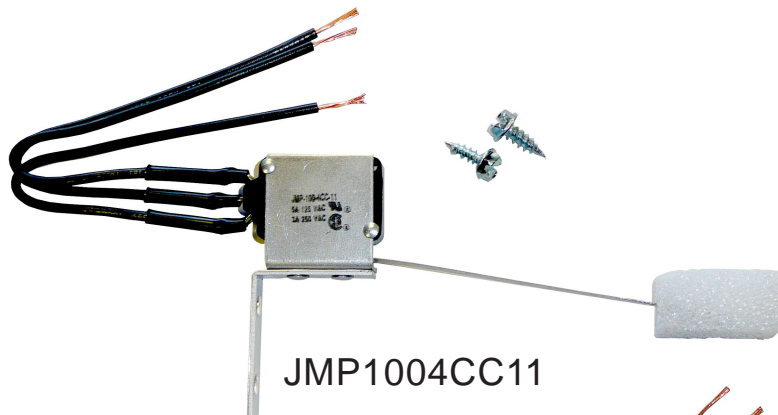

JMP Float Switch Features:

- Universal Condensate Float Switch
- NO contacts make on float rise
- NC contacts break on float rise
- Maximum Operating Temp 150°F

SJMP Sail Switch Features:

- Air flow detection
- SPDT model used to make or break on air flow
- NO contacts make on air flow
- Maximum Operating Temp 150°F

JMP Switches are made in the U.S.A.

Model	PCN#	Description	Mounting	Switch	Operating Force	Rating
JMP1004CC	05400002	Float Switch	Spring Clip	SPDT	20-27 Grams	5A @ 125V 3A @ 250V
JMP1004CC11	05400102	Float Switch	L Bracket	SPDT	20-27 Grams	
JMPC1004CC	05420002	Float Switch	Spring Clip	NC SPST	20-27 Grams	
JMPC1004CC11	05420102	Float Switch	L Bracket	NC SPST	20-27 Grams	
JMPO1004CC	05420302	Float Switch	Spring Clip	NO SPST	20-27 Grams	
JMPO1004CC11	05405502	Float Switch	L Bracket	NO SPST	20-27 Grams	
SJMP1024C	05421202	Sail Switch	Holes	SPDT	33-44 Grams	
SJMPO1024C	05421802	Sail Switch	Holes	NO SPST	33-44 Grams	